




11-JUL-2005 DGN File: L:\Standard Drawings\Internal\2005\Approved\Change3\Approved\va05C.dgn

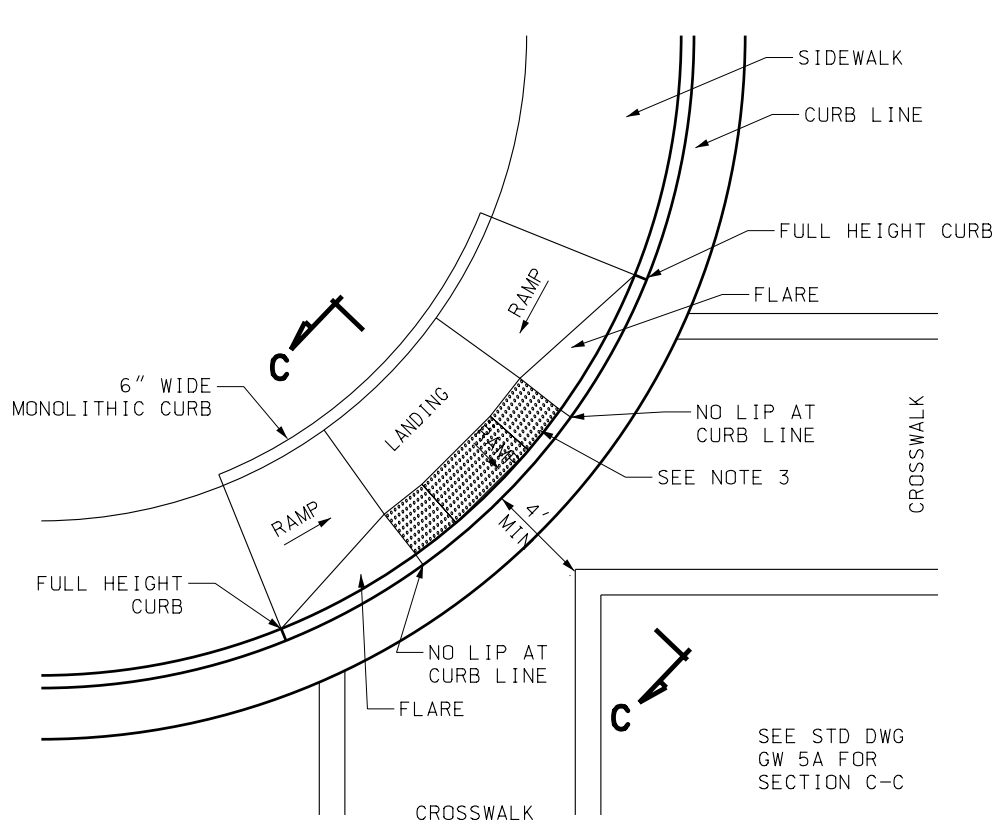

CORNER PEDESTRIAN RAMP
EXAMPLE

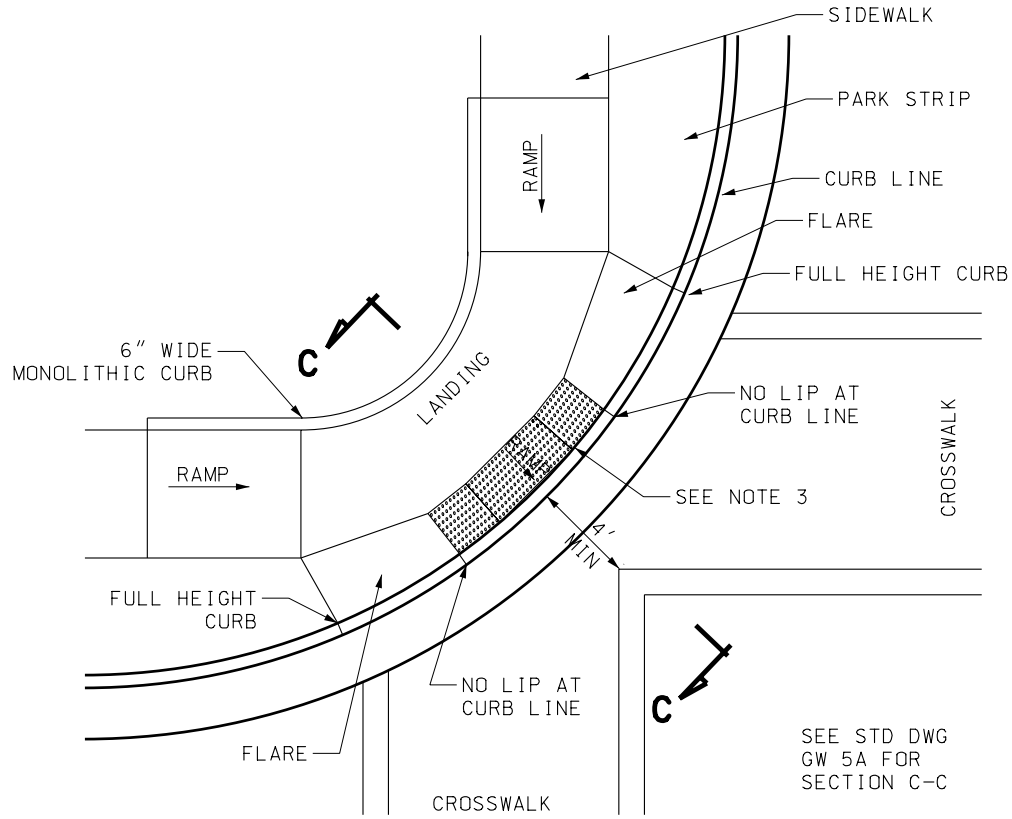

CORNER PEDESTRIAN RAMP
EXAMPLE

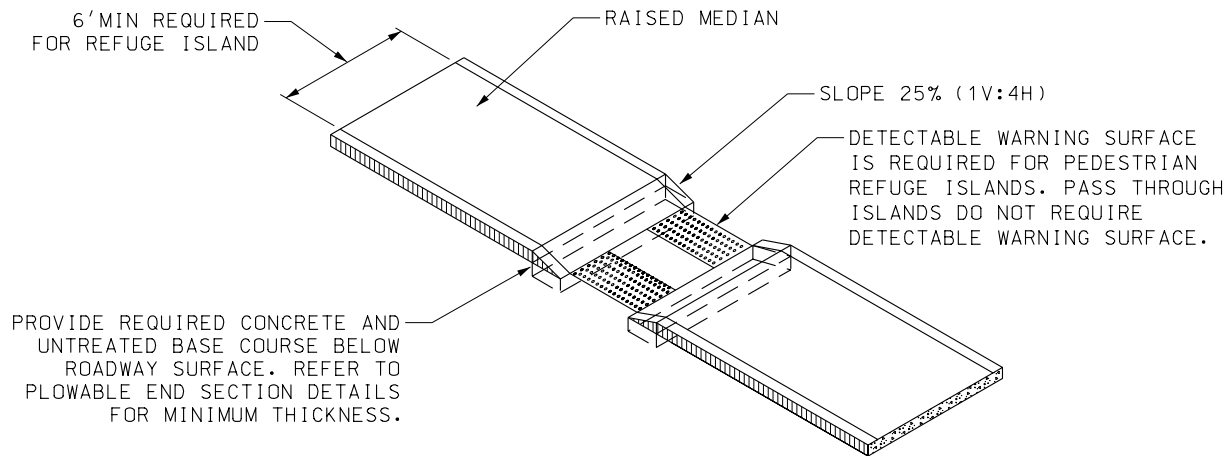

MEDIAN BREAK
EXAMPLE

NOTES:

1. REFER TO STD DWG GW 5A FOR PEDESTRIAN ACCESS RAMP DETAIL AND SLOPE REQUIREMENTS.
2. PROVIDE DETECTABLE WARNING SURFACE FOR FULL WIDTH OF RAMP, LANDING, OR CURB CUT. SEE DETAIL A ON STD DWG GW 5A FOR DETECTABLE WARNING SURFACE DIMENSIONS.
3. LOCATE DETECTABLE WARNING SURFACE SO THAT THE EDGE NEAREST THE STREET IS 6" TO 8" FROM THE CURB LINE.
4. WHEN DETECTABLE WARNING SURFACE IS CUT, GRIND REMAINING PORTION OF ANY CUT DOMES. SEAL ALL CUT PANEL EDGES TO PREVENT WATER DAMAGE.
5. LOCATE CURB CUT WITHIN CROSSWALK.

UTAH DEPARTMENT OF TRANSPORTATION
STANDARD DRAWINGS FOR ROAD AND BRIDGE CONSTRUCTION

RECOMMENDED FOR APPROVAL
SALT LAKE COUNTY

CHAIRMAN STANDARDS COMMITTEE
APPROVED

DEPUTY DIRECTOR

PEDESTRIAN ACCESS

STANDARD DRAWING TITLE

STD DWG
GW 5C

REVISIONS
1 06/30/05 L.M. MEDIAN BREAK EXAMPLE MODIFIED.

REMARKS

NO. DATE APPR.